



DomusAir - Stambena ventilacija

DomusAir - Residential ventilation

Aksijalni ventilatori "ELICAL"

Axial fans "ELICAL"

22

	Opis	Description	Info	
VNS100B VNS100TB	  	VNS100B Aksijalni ventilator Ø100mm - motor sa ležajevima - montira se u kupatilu, toaletu i malim prostorijama Osnovni model Axial fan Ø100mm - sleeve bearing motor - for installation in bathrooms, toilets and small living areas Basic version		1 1
VNS120B VNS120TB	 	VNS120B Aksijalni ventilator Ø120mm - motor sa ležajevima - montira se u kupatilu, toaletu i malim/srednjim prostorijama Osnovni model Axial fan Ø120mm - sleeve bearing motor - for installation in bathrooms, toilets and small/medium living areas Basic version		1 1
VNS150B VNS150TB	 	VNS150B Aksijalni ventilator Ø150mm - motor sa ležajevima - montira se u kupatilu, toaletu i prostorijama srednje veličine Osnovni model Axial fan Ø150mm - sleeve bearing motor - for installation in bathrooms, toilets and medium living areas Basic version		1 1
		Napomena: za tehničke karakteristike i svojstva pogledajte na stranama 23-24-25 Note: for technical specifications and performance, please refer to page 23-24-25		



Za raspoloživost kontaktirajte
Ave distributere
For availability please contact
sales dept.



Dostupni dok se ne
rasprodaju zalihe
Available until stock out



Min. pakovanje kom.
Min. Packaging pcs



Stand. pakovanje kom.
Std. Packaging pcs

Osnovni model

Ventilator se uključuje preko posebnog ON/OFF prekidača ili preko prekidača za svetlo.

Način rada: nakon isključivanja, ventilator nastavlja da radi do isteka unapred podešenog perioda.

Run-on timer version

The fan is equipped with a timer circuit adjustable from about 1 to 25 minutes.

Operation: after switching off, the fan continues to run for the pre-set period of time.

Model sa tajmerom (sa odloženim isključivanjem) Basic version

Ovaj model poseduje programabilni tajmer koji se može podešavati u vremenskom intervalu od 1 do 25 minuta.

Karakteristike Features

- Asortiman aksijalnih ventilatora koji su idealni za provertravanje kupatila, toaleta i malih/srednjih prostorija
- Na raspolaganju su 3 veličine, Ø100-120-150mm prilagodene za montažu na standardne cevi.
- Projektovani su tako da ustajali vazduh odvode u spoljašnju sredinu direktno ili preko kratkih cevi (dužine manje od 1,5m)
- Pogodni su za instalaciju na zid, tavanicu ili na prozor.
- Spoljašnje dimenzije su tako osmišljene da mogu da prekriju tragove montaže prethodnih ventilatora, ako postoje.
- Plastični delovi izrađeni su od ABS plastike visokog kvaliteta, koja je otporna na udarce i UV zračenja - bele boje RAL9010.
- Plastika se može reciklirati.
- Maska je elegantnog dizajna i minimalističkih linija; lako se kombinuje sa svakim tipom enterijera.
- Centralni aerodinamični luk sa specijalnim deflektorima na nosaču motora koji poboljšavaju učinak i stvaraju manje trenje pri protoku vazduha, čime se garantuje maksimalan akustični komfor.
- Dodatni poklopac koji se isporučuje sa ventilatorom. Sastoji se od prstena sa zadnje strane koji se može skinuti, sa plastičnim krilcima (koja sprečavaju prodror vazduha iz spoljašnje sredine kada je ventilator isključen)
- Prsten sa zadnje strane koji sprečava deformisanje otvora prilikom instalacije.
- Dodatni zaptivak za instalaciju na tavanice, na zahtev (str. 25)
- Dodatni pribor za staklo (str.42).
- Aerodinamični ventilator visoke efikasnosti, sa lopaticama tipa "winglet", odnosno sa krilcima zahvaljujući kojima se postiže besuman rad i visok učinak.
- Induktivni monofazni motor sa termičkom zaštitom.
- Motor sa ležajevima visokog kvaliteta
- Pogodni su za kontinualan ili naizmeničan način rada.
- Stepen zaštite IPX4.
- Izrađeni su sa duplom izolacijom koja korisniku garantuje maksimalnu bezbednost.
- Ideal for air-extraction in bathroom, toilet and small/medium premises.
- Available in 3 diameters Ø100-120-150mm, suitable for connection to standard ducting.
- Suitable to extract stale air directly to the outside or through short length ducting (less than 1,5m).
- For wall/panel, ceiling and window installation.
- Perimetral size duly designed in order to cover, in case of replacement, the signs left on the wall by the previously installed fan.
- Plastic parts made of high quality ABS, shock-
- proof and UV resistant - RAL 9010 colour.
- Totally recyclable plastic components.
- Stylish bright finishing of the front cover to meet any modern interior design requirement.
- Aerodynamic-shaped inlet and deflectors to optimize the efficiency and the acoustic comfort.
- Back-draught shutter accessory supplied. It consists of a removable ring provided with a mylar flap, to prevent air flowing back into the room when the fan is off.
- Reinforcing rear plastic ring mounted at the spigot end to prevent it to get deformed during the installation.
- Gasket accessory for ceiling mounting on request (page 25).
- Window kit accessory on request (page 42).
- Highly efficient winglet-type impeller for high performance and top acoustic comfort.
- Single-phase induction motor with integral thermal protection.
- High quality sleeve bearing motor.
- Suitable for continuous and intermittent running.
- IP degree: X4
- Double insulated unit for the tenant's electrical safety



DomusAir - Stambena ventilacija

DomusAir - Residential ventilation

Aksijalni ventilatori "ELICAL"

Axial fans "ELICAL"

24


Detalji Details



centralni aerodinamični luk
aerodynamic-shaped inlet



pribor za zatvaranje otvora
back-draught shutter accessory



ventilator sa lopaticama "winglet"
winglet-type impeller

Performanse Performance

Kod Code	Model Model	Protok Air flow m ³ /h max	Statički pritisak Static pressure Pa max	Napajanje Power supply V~	Potrošnja Power W max	Zvučni pritisak Sound Pressure dB(A) @3m	Temp. prostorije Ambient temp. °C max	Oznaka Marking
VNS100B	ELICAL	88	27	220-240 50/60Hz	8	34	50	C
VNS100TB	ELICAL	88	27	220-240 50/60Hz	8	34	50	C
VNS120B	ELICAL	175	40	220-240 50/60Hz	14	40	50	C
VNS120TB	ELICAL	175	40	220-240 50/60Hz	14	40	50	C
VNS150B	ELICAL	330	59	220-240 50/60Hz	24	46	50	C
VNS150TB	ELICAL	330	59	220-240 50/60Hz	24	46	50	C


Napomene: ✓ vazdušne performanse izmerene prema standardu ISO 5801 na 230V 50Hz, gustina vazduha 1,2 Kg/m³

/Notes: air performance measured according to ISO 5801 at 230V 50Hz, air density 1,2 Kg/m³


✓ podaci izmereni u akreditovanoj laboratoriji TÜV Rheinland - data measured in TÜV Rheinland accredited laboratory

Krivulje Curves


VNS100B - VNS100TB

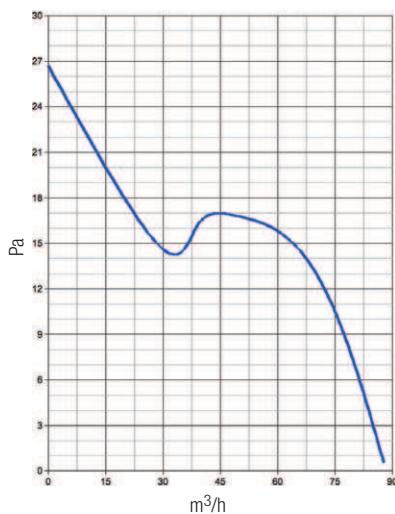

VNS120B - VNS120TB

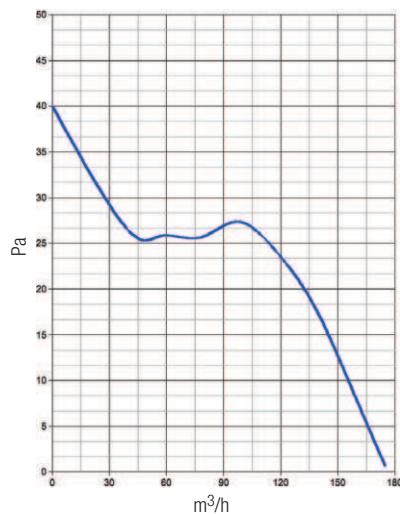

VNS150B - VNS150TB

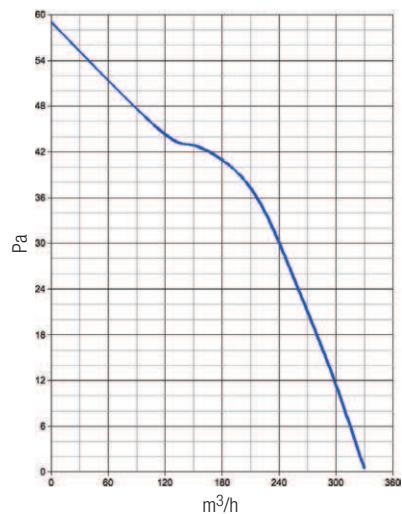

Za raspoloživost kontaktirajte
Ave distributore
For availability please contact
sales dept.



Dostupni dok se ne
rasprodaju zalihe
Available until stock out




Min. pakovanje kom.
Min. Packaging pcs



Stand. pakovanje kom.
Std. Packaging pcs

Dimenzijs (u mm) Dimensions (mm)

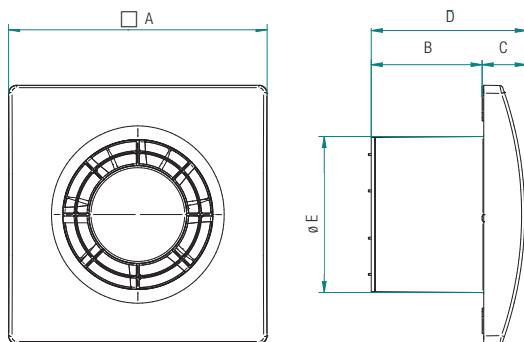

Kod	Code	A	B	C	D	ØE
VNB100 - VNS100TB		164	70	28	98	99
VNB120 - VNS120TB		184	81	27	108	119
VNB150 - VNS150TB		218	97	27	124	148

Aksijalni
Axial


Instalacija Installation

Aksijalni ventilator predstavlja idealno rešenje za odvod značajne zapremine vazduha direktno u spoljašnju sredinu. S obzirom da stvara nizak pritisak, i on mora biti povezan na odvod odgovarajućeg prečnika i dužine manje od 1,5m.


Pogrešna instalacija može da ugrozi pravilan rad i/ili učinak ventilatora.

The axial fan is the ideal solution to extract significant volumes of stale air directly outside. Since it generates


limited pressure, it must be connected to the appropriate diameter duct less than 1,5m long. Improper installation may result in an incorrect operation and/or decrease of the fan performance.



centralna aspiracija
central extraction




zid/panel
wall/panel





tavanica (pribor na zahtev)
ceiling (accessory on request)



prozor (pribor na zahtev)
window (accessory on request)



kratak odvodni kanal
short length of ducting



Pribor Accessories



441048M (Domus Touch)
442048M (Life Touch)
443048M (Allumia Touch)

Regulator brzine
Speed controller



441021 (Domus Touch)
442021 (Life Touch)
443021 (Allumia Touch)

Tajmer
Timer



441079 (Domus Touch)
442079 (Life Touch)
443079 (Allumia Touch)

Senzor vlažnosti vazduha
Humidistat



441068RL (Domus Touch)
442068RL (Life Touch)
443068RL (Allumia Touch)

IC detektor prisustva
PIR sensor



VNGS100 (Ø 100 mm)
VNGS120 (Ø 120 mm)
VNGS150 (Ø 150 mm)

Zaptivak za plafon
Ceiling gasket